


ENDLESS
COLLECTION



800x1600 mm

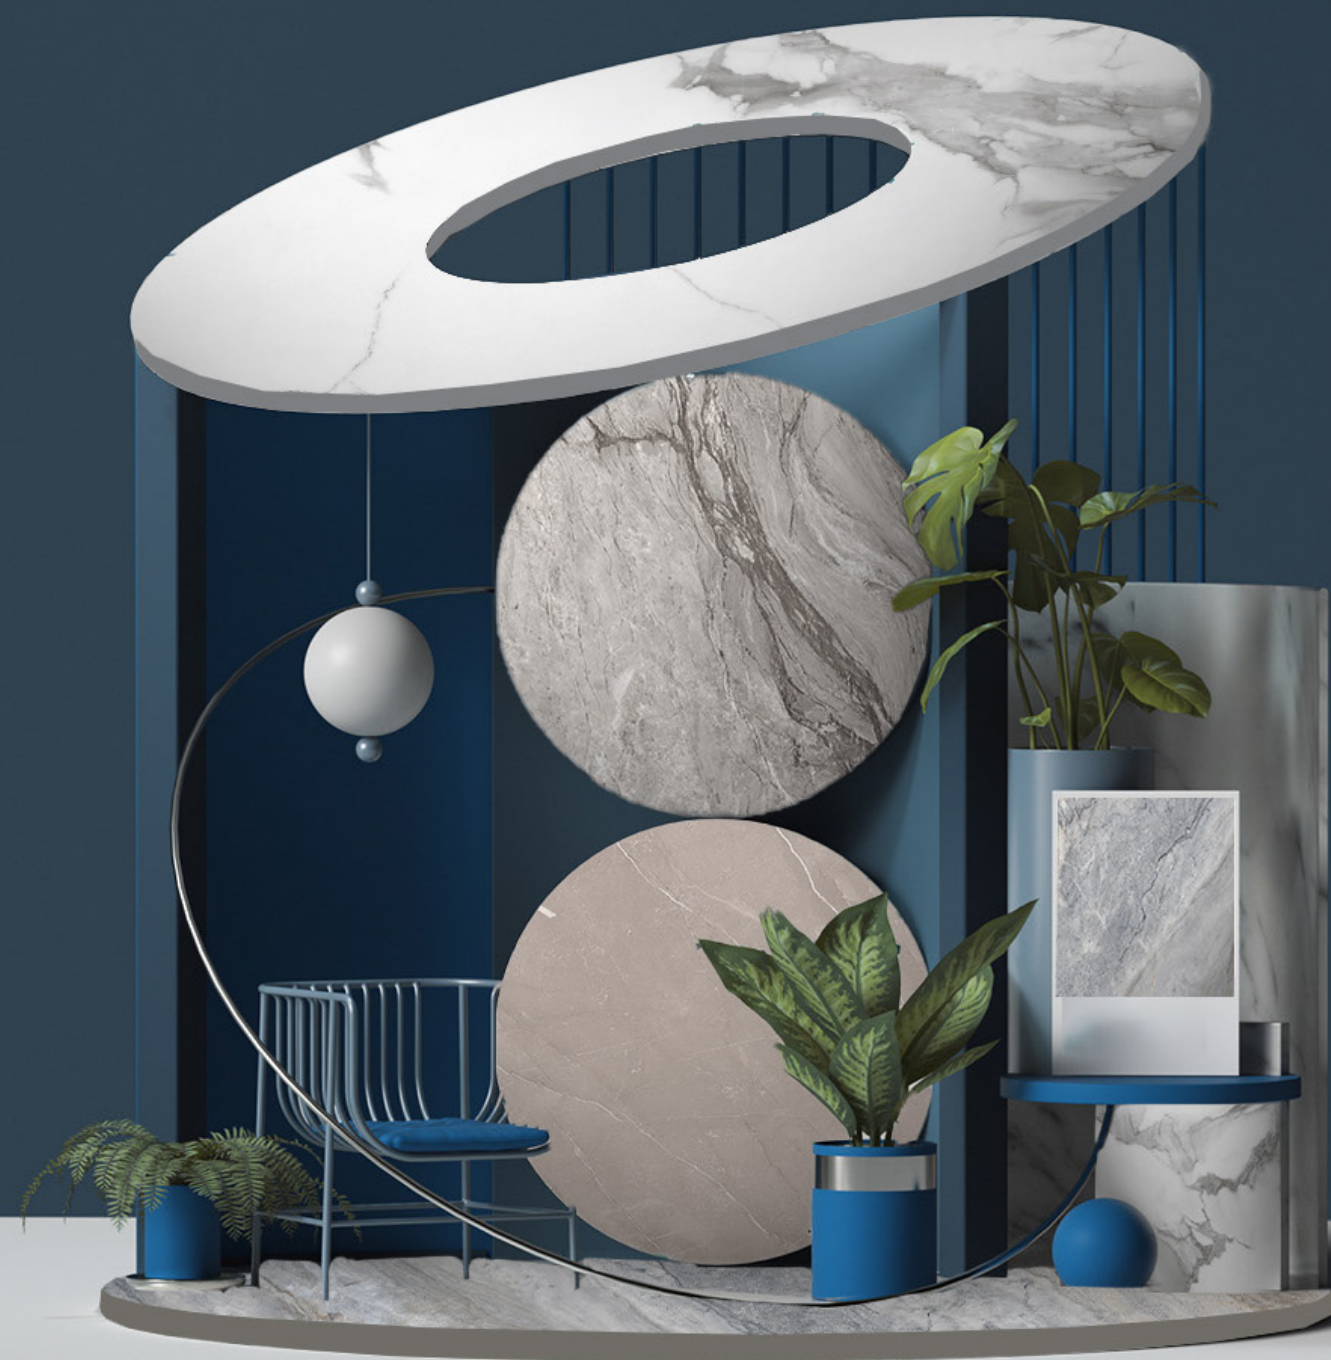

AVAILABLE SIZES :

**1200x
3200mm**

**THICKNESS : 15 MM
COLOR BODY**

**800x
3000mm**

**THICKNESS : 15 & 18 MM
FULL BODY | COLOR BODY**

**800x
2400mm**

**THICKNESS : 15 & 18 MM
FULL BODY | COLOR BODY**

**1200x
1600mm**

**THICKNESS : 15 MM
COLOR BODY**

800x1600mm

A Perfect Size To Fix At All The Places And Fill Your Space With Graves. These Enormous Regular Size Tiles Are Made To Get Along With Uneven And Impartial Spaces With Utter Smoothness.


800X1600



Endless tiles have continuous vein matching patterns that fall into place no matter which way they are laid. The pattern will remain the same regardless of which tile face is placed anywhere. Endless tiles can give the impression of more space in your home or workplace.


Available Sizes ◀

800X1600 MM




9 MM
THICKNESS

800X2400 MM
800X3000 MM
800X3200 MM
1200X1600 MM
1200X2400 MM



15 MM
THICKNESS

1600X3200 MM





12 & 20 MM
THICKNESS

To find the most suitable size for your space to enhance your home environment could be delicate. It is essential to balance functionality and aesthetics, and to take into account the technical advantages of the different sizes.





ENDLESS 005

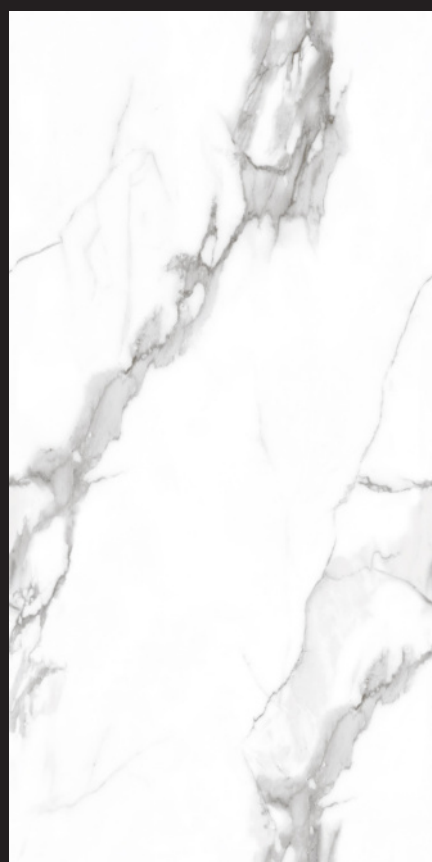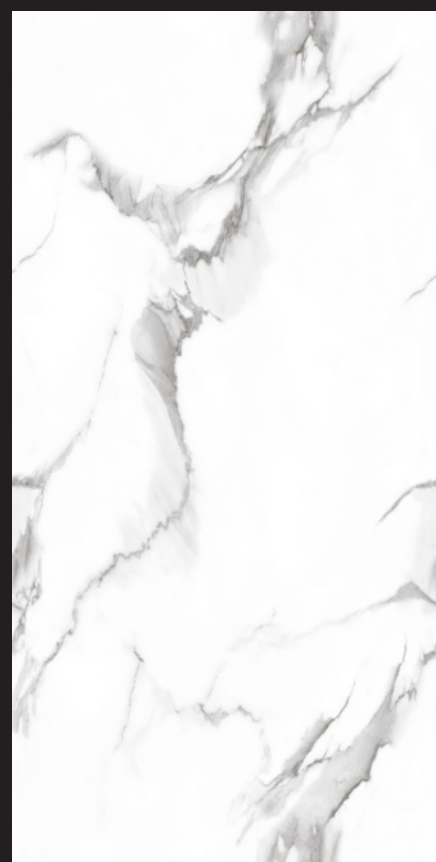

RANDOM FACES - 3

ENDLESS 005

**FINISH
GLOSSY**

**SIZE
800x1600mm**

ENDLESS
COLLECTION



ENDLESS 031



ENDLESS 031

FINISH
GLOSSY

SIZE
800x1600mm

RANDOM FACES - 4

ENDLESS
COLLECTION



ENDLESS GLOSTER GREY



ENDLESS GLOSTER GREY

FINISH
GLOSSY

SIZE
800x1600mm

RANDOM FACES - 3

ENDLESS
COLLECTION



ENDLESS LAPIS GREY



RANDOM FACES - 3

ENDLESS LAPIS GREY

**FINISH
GLOSSY**

**SIZE
800x1600mm**

ENDLESS
COLLECTION

Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% de ects free	> 95% de ects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value> 90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3 <Gloss Value<7	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7<Gloss Value<18	Gloss Meter 60°
Structural Properties			
Water absorption	≤ 0.50 %	≤ 0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm²	Min. 42.0 N/mm²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥7.5mm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness #	as per mfg.	Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Deep abrasion resistance #	Max. 175mřm	Max. 132mřm	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy PO(< ¹²) / Posh ≥P ¹ (¹² - ²⁴)	BS 7976-2
Slip resistance(DCOF)(R value) ##	as per mfg.	R9 to R ¹³	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

* With Nano polishe
** Except Hydrofluoric Acid & it's compound
Tiles Intended for use on floor
As per customer requirement

Packing Details

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT (Kg)
Endless Collection	800x1600mm	9mm	2pc	27.55 Sq ft	53 Kgs