




Exceeding The Limits To Always Get The Best

800x3200 MM



CONNECTING THE VALUE OF SLAB

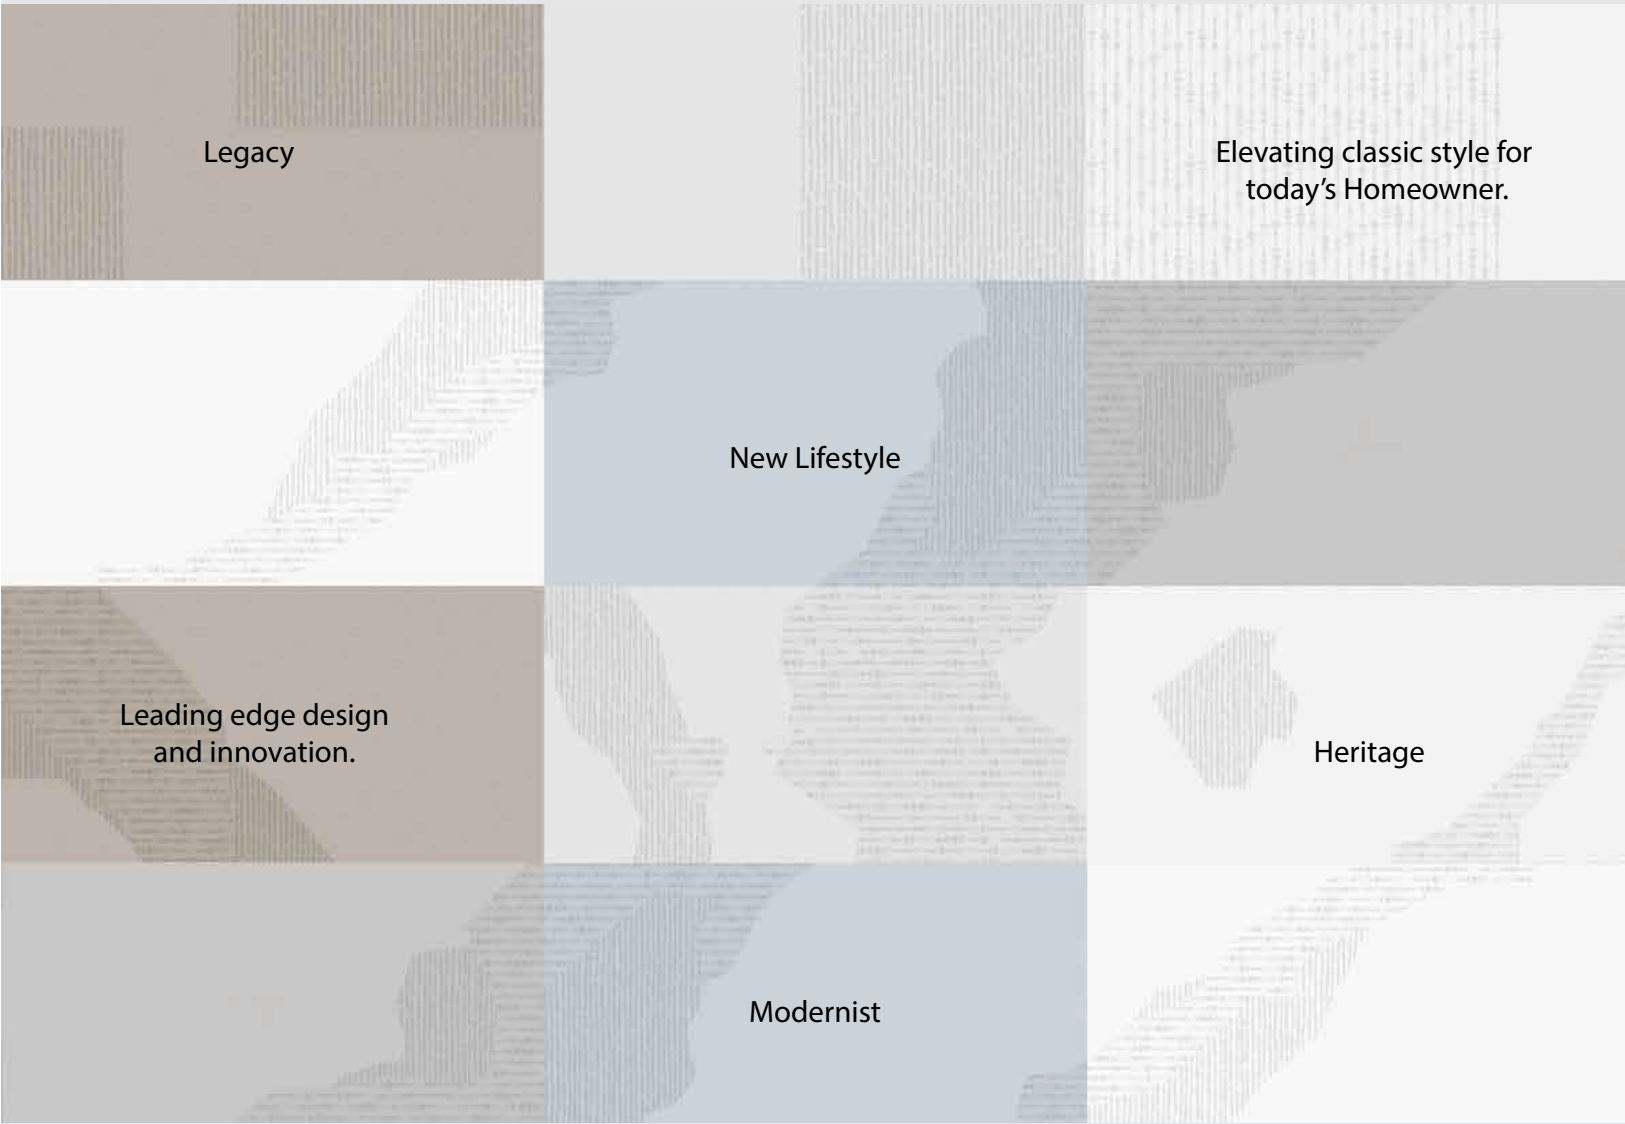



CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of porcelain slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.



CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.




# PRODUCT Formats

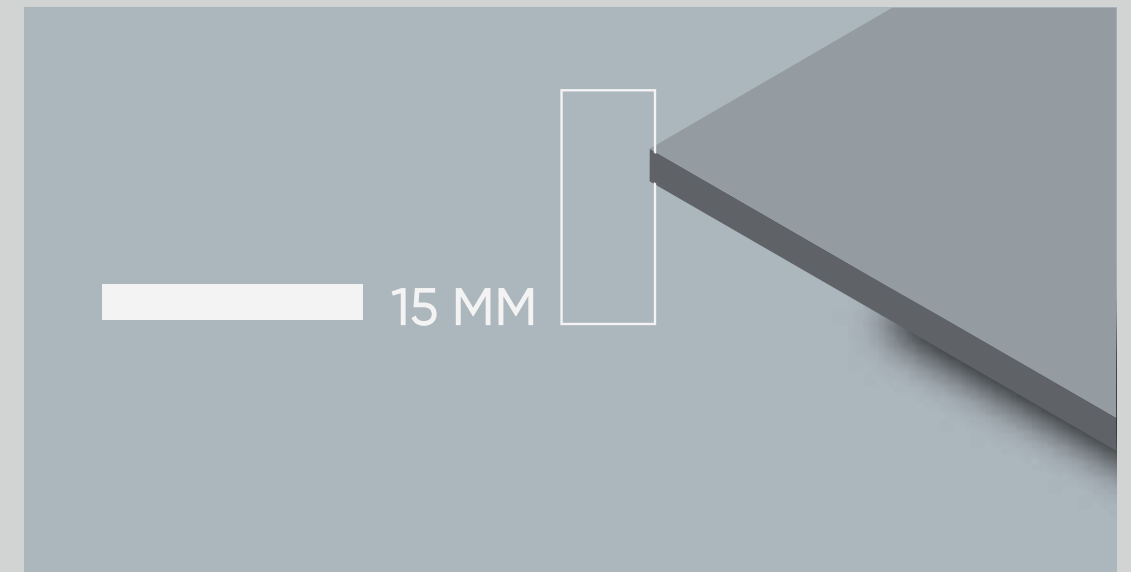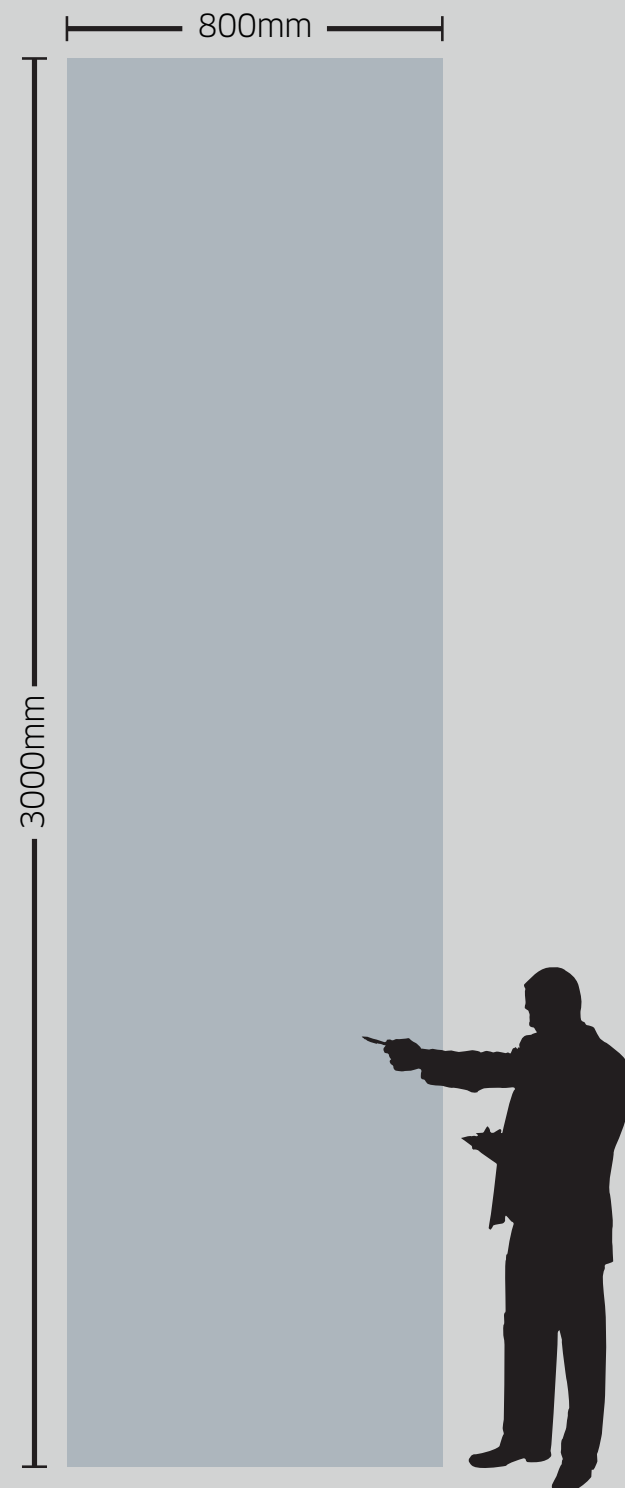

The thicknesses are one of the most important elements characterizing.

15 mm is set aside for the most demanding product applications such as kitchen countertops.

# EDGE Profiles



Double straight rounded edge



Rounded straight edge



Half bullnose




Full bullnose



Demi bullnose



Micro bevel



Straight squared edge



Double straight squared edge



Rounded edge at 45°



Squared edge at 45°

Giving a nice trim to the edges of the tiles adds to its beauty.

As these tiles are of the good thickness of 15mm, it is possible to shape its edges in different styles and create aesthetically rich countertops for your space.

## JOINT POSSIBILITIES



Birds beak



45° corner



Soft corner





# APPLICATION

Areas

KITCHEN COUNTERTOP



DINING TABLE



LIVING ROOM



FURNITURE



STAIRCASE



OFFICE TABLE



TABLE TOP



DOOR \ WINDOW  
FRAME



# TECHNICAL

Features

LIGHTWEIGHT



WATERPROOF



RESISTANT TO SCRATCHES



RESISTANT TO HIGH  
TEMPERATURES



EASY TO CLEAN



RESISTANT TO BENDING



100% NATURAL



RECYCLABLE



HYGIENIC



RESISTANT TO UV RAYS





**LOURENT GOLD**


**BODY**  
**BLACK BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



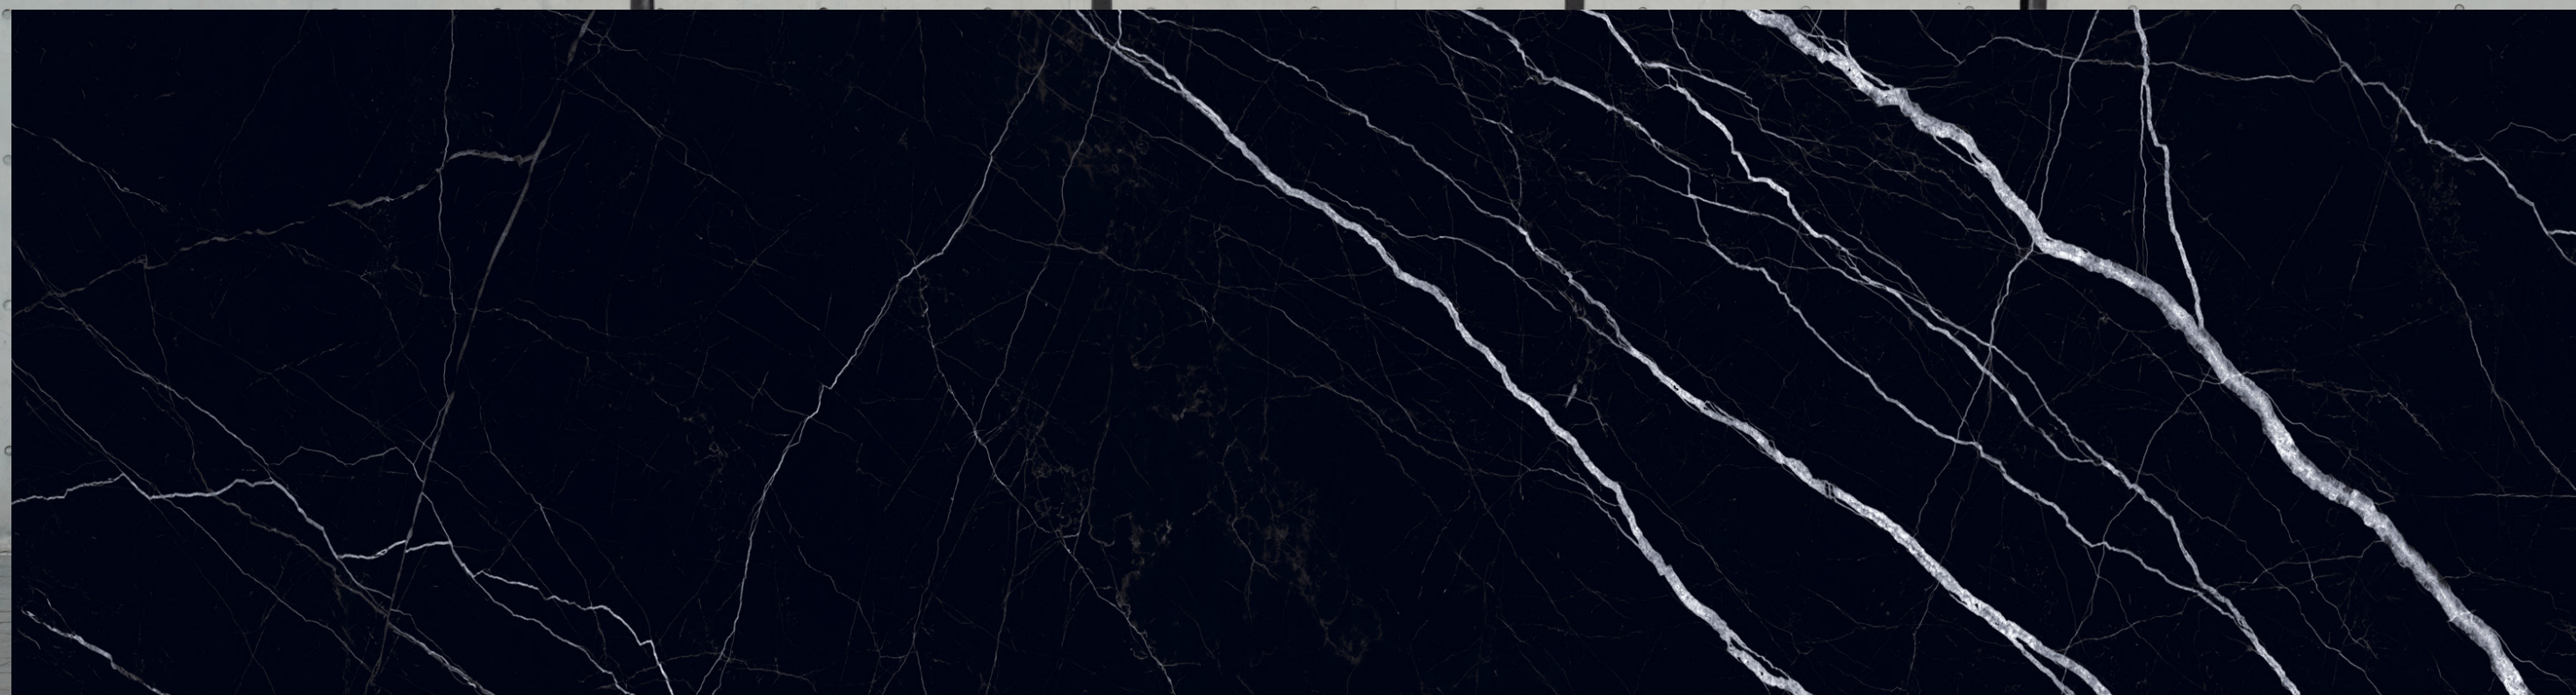

**MARQUINA NERO**

**BODY**  
**BLACK BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**METAL BLACK**

**BODY**  
**BLACK BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**PORTE NOIR**

**BODY**  
**BLACK BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**WAVE BLACK**


**BODY**  
**BLACK BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



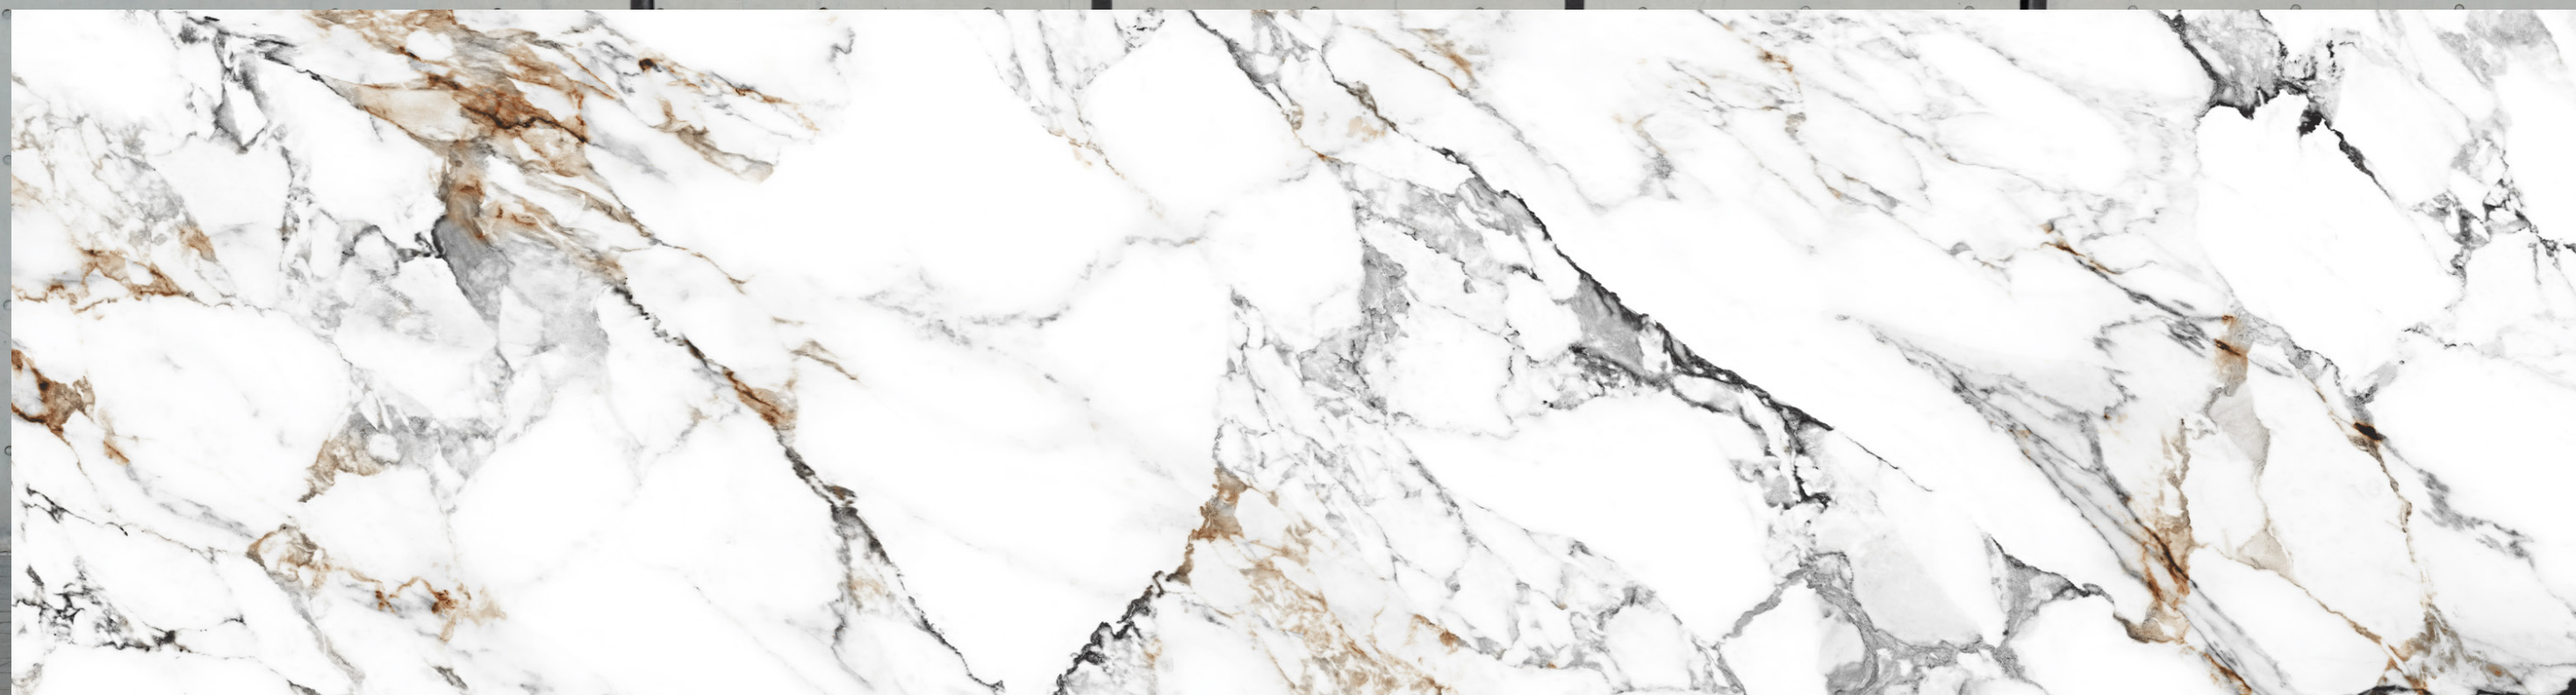

**ARABESCATO GOLD**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



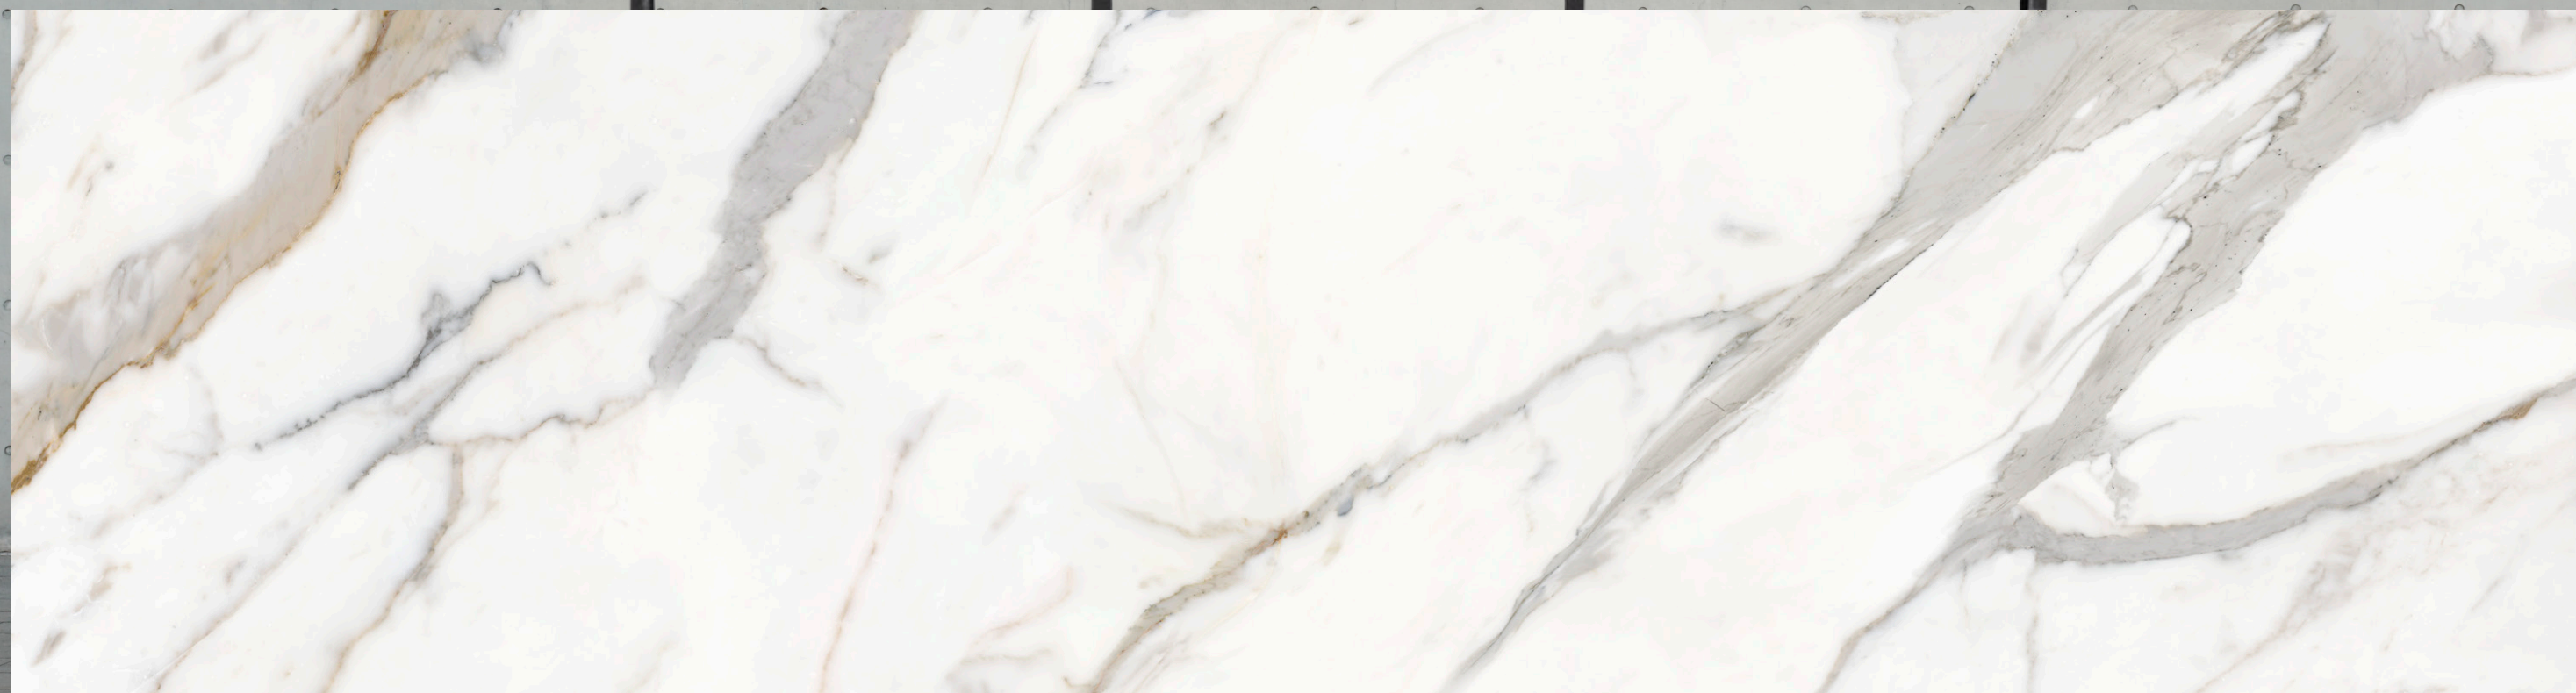

**BIANCO EXTRA**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



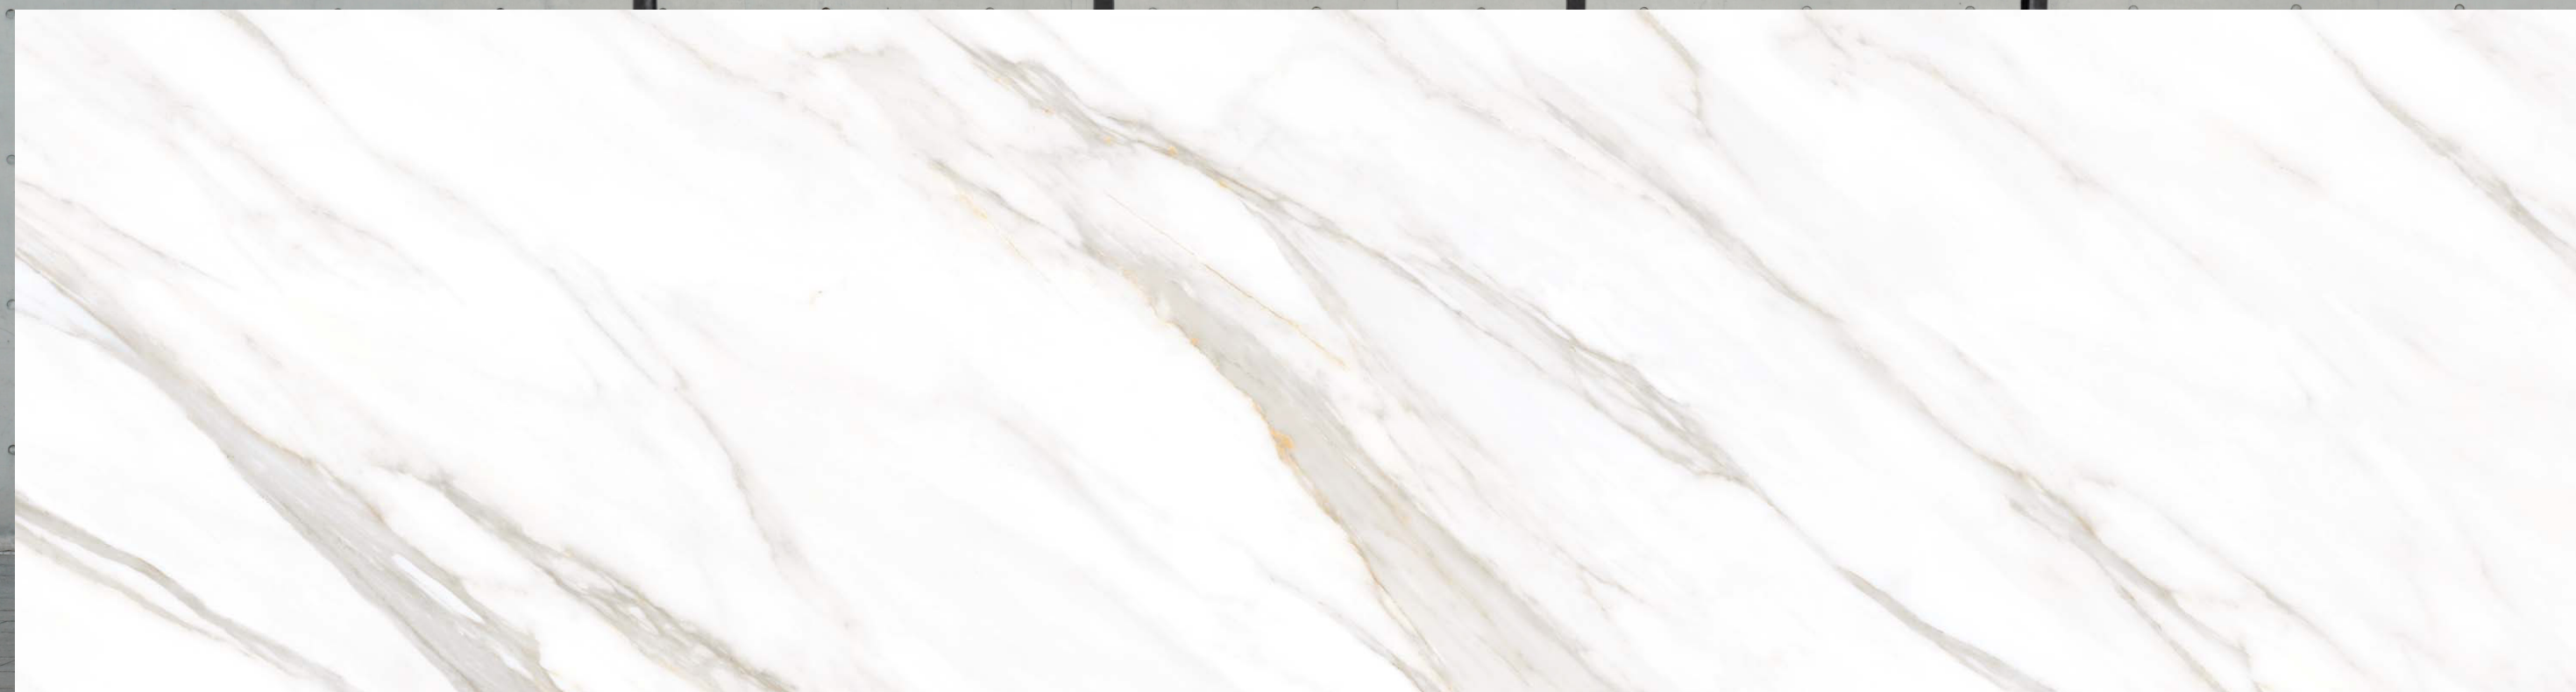

**BORGHINI ORO**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**BREACH**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**CALCATTÀ ULTRA**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



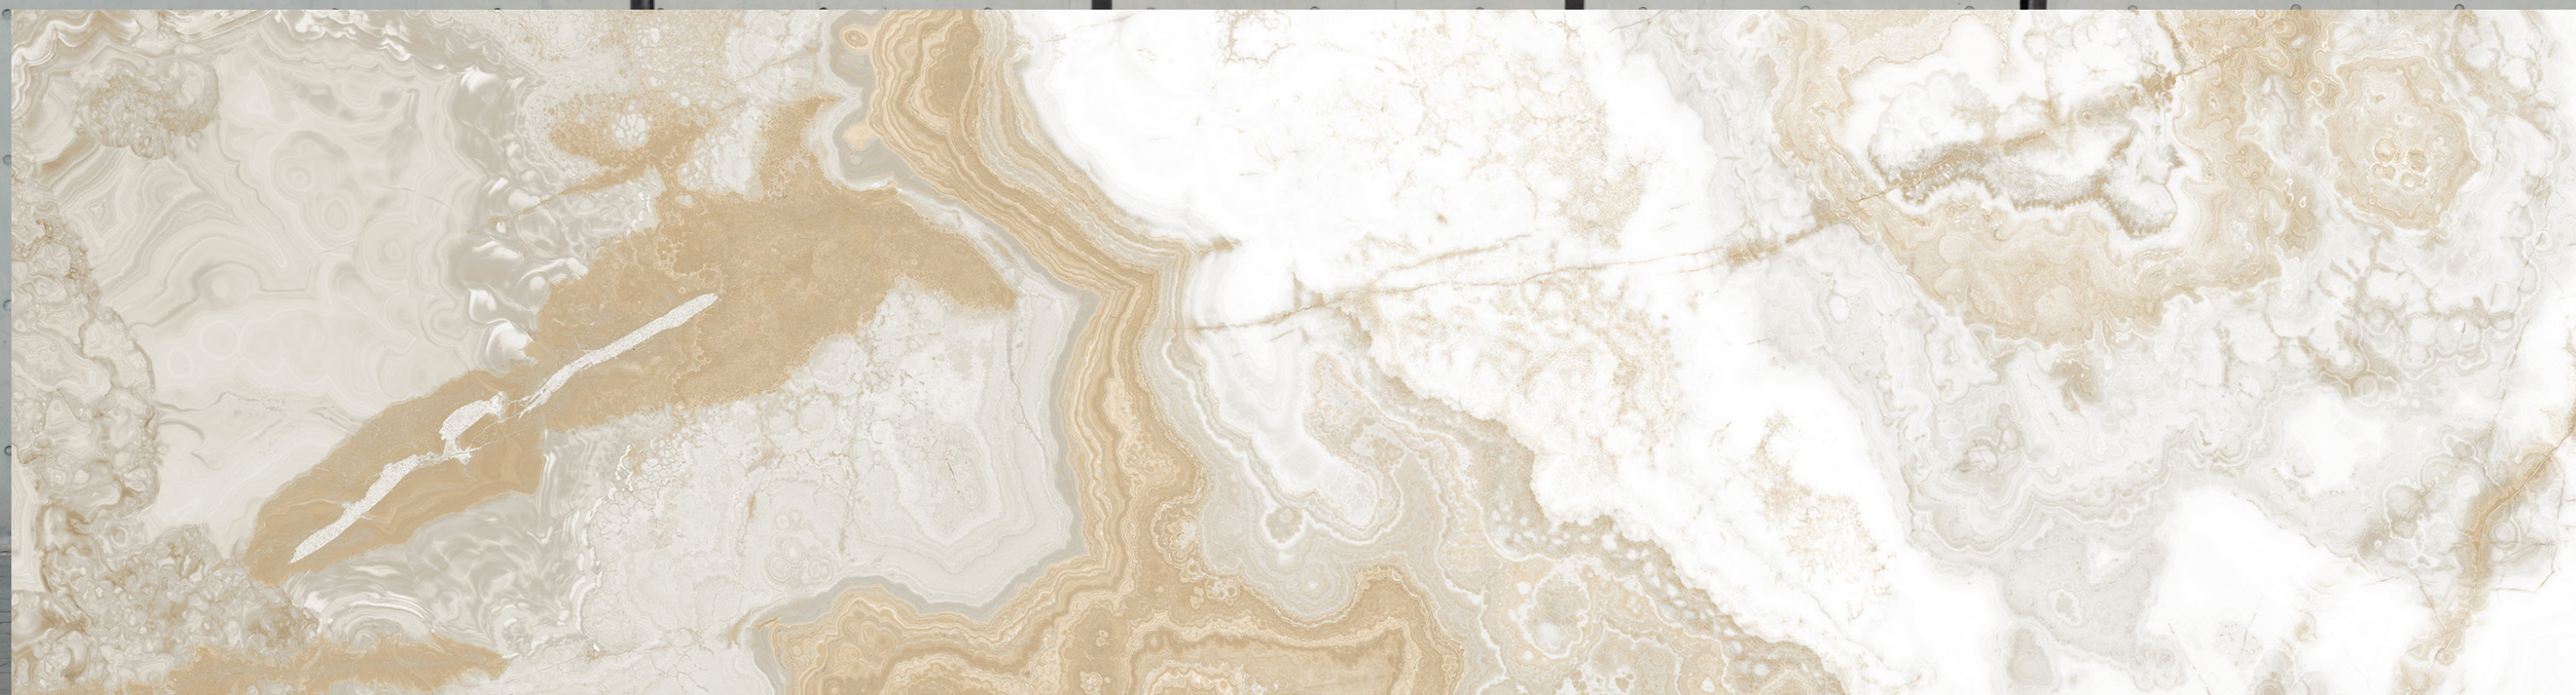

**DELMARE**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**FURR WHITE**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



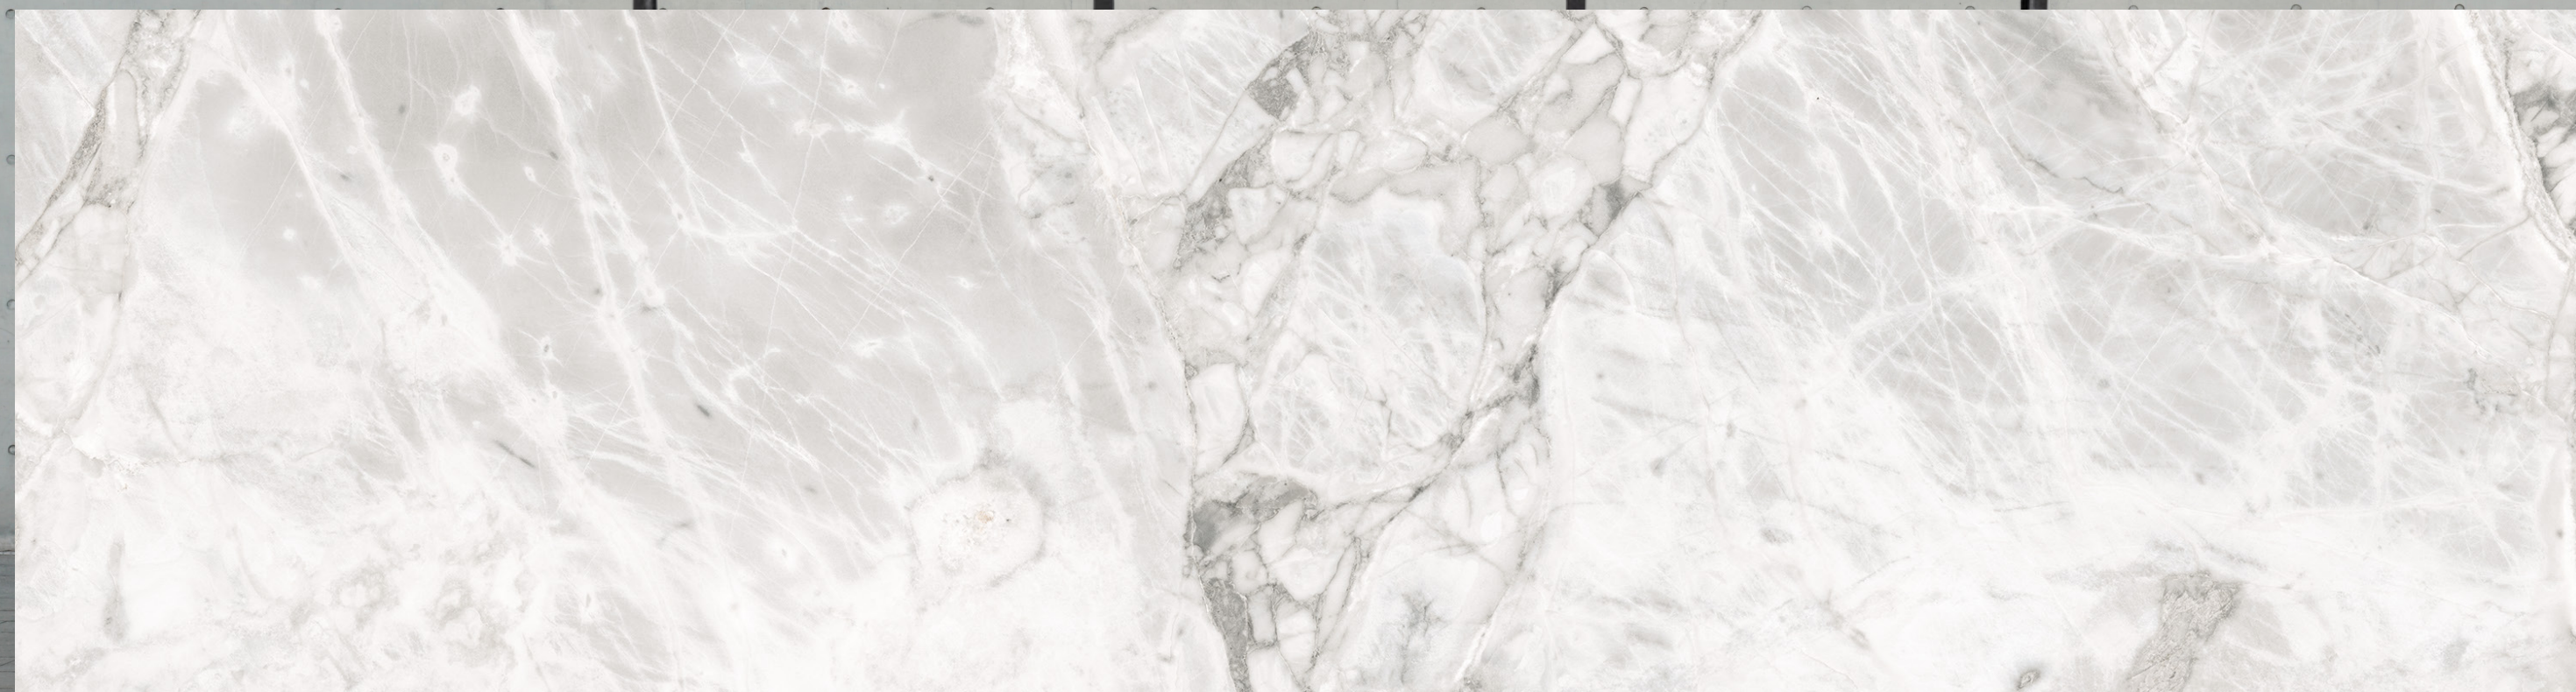

**HEROZIN WHITE**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**LASA COVELANO**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



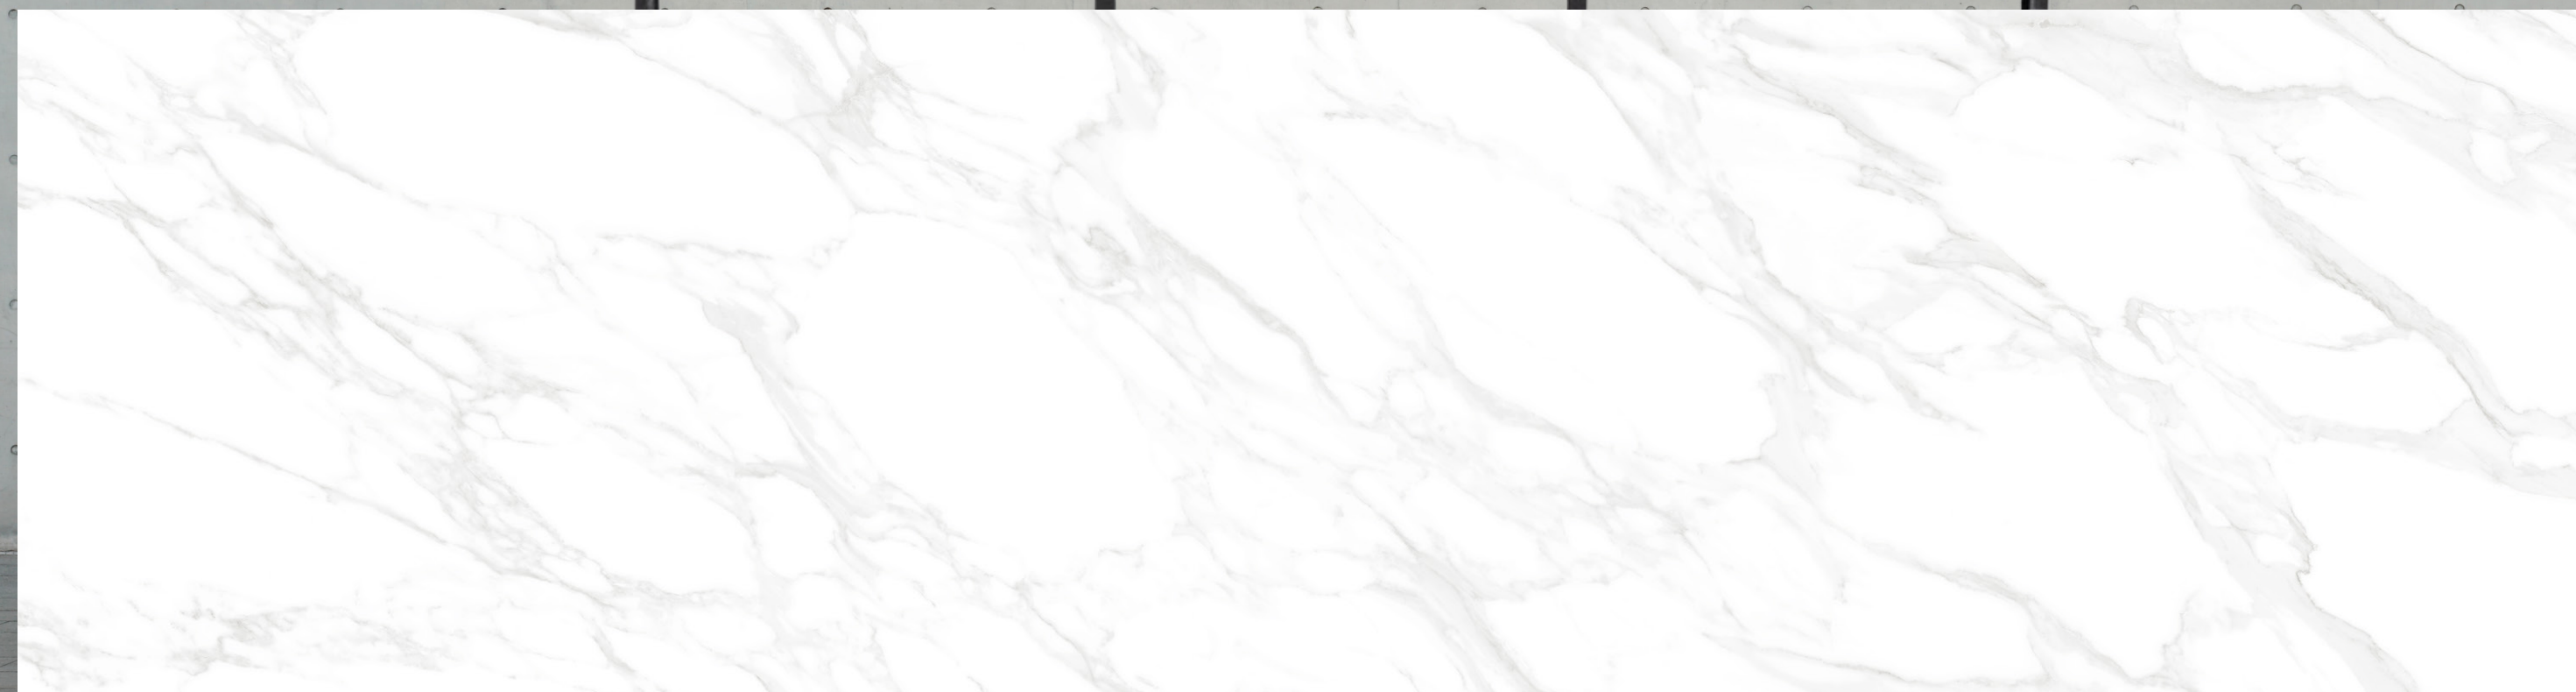

**LAVA STATUARIO**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



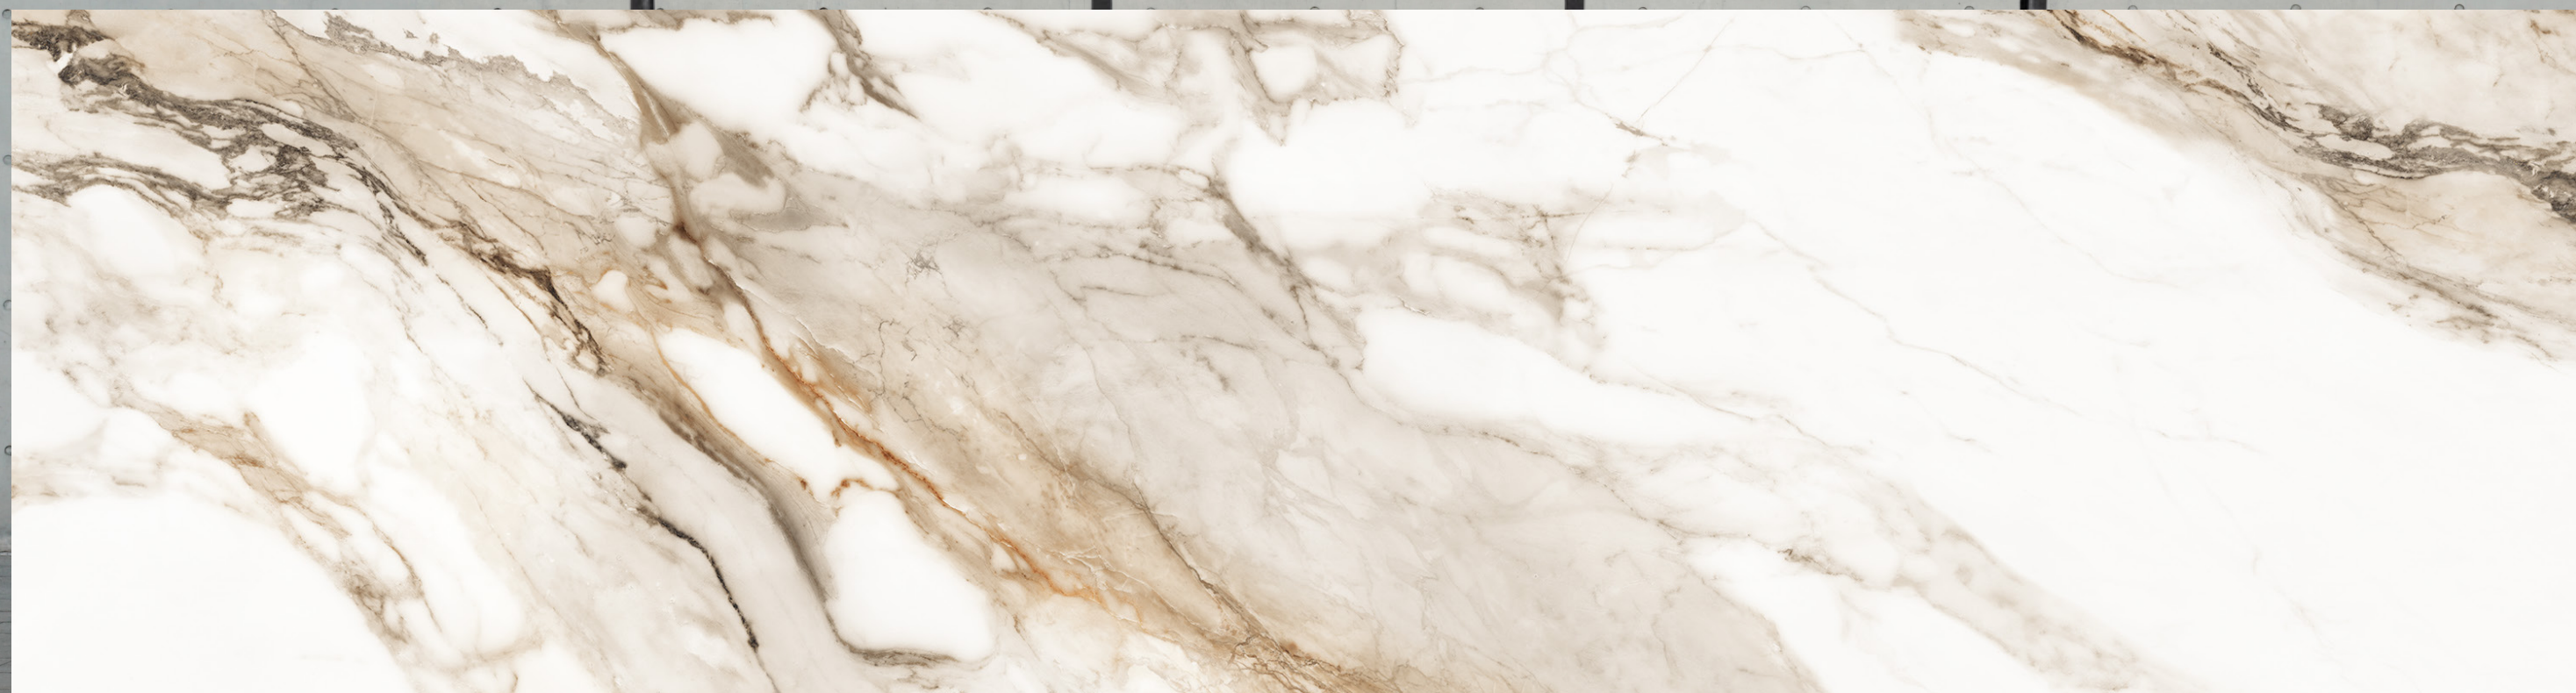

**MACHIA VECCHIA**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



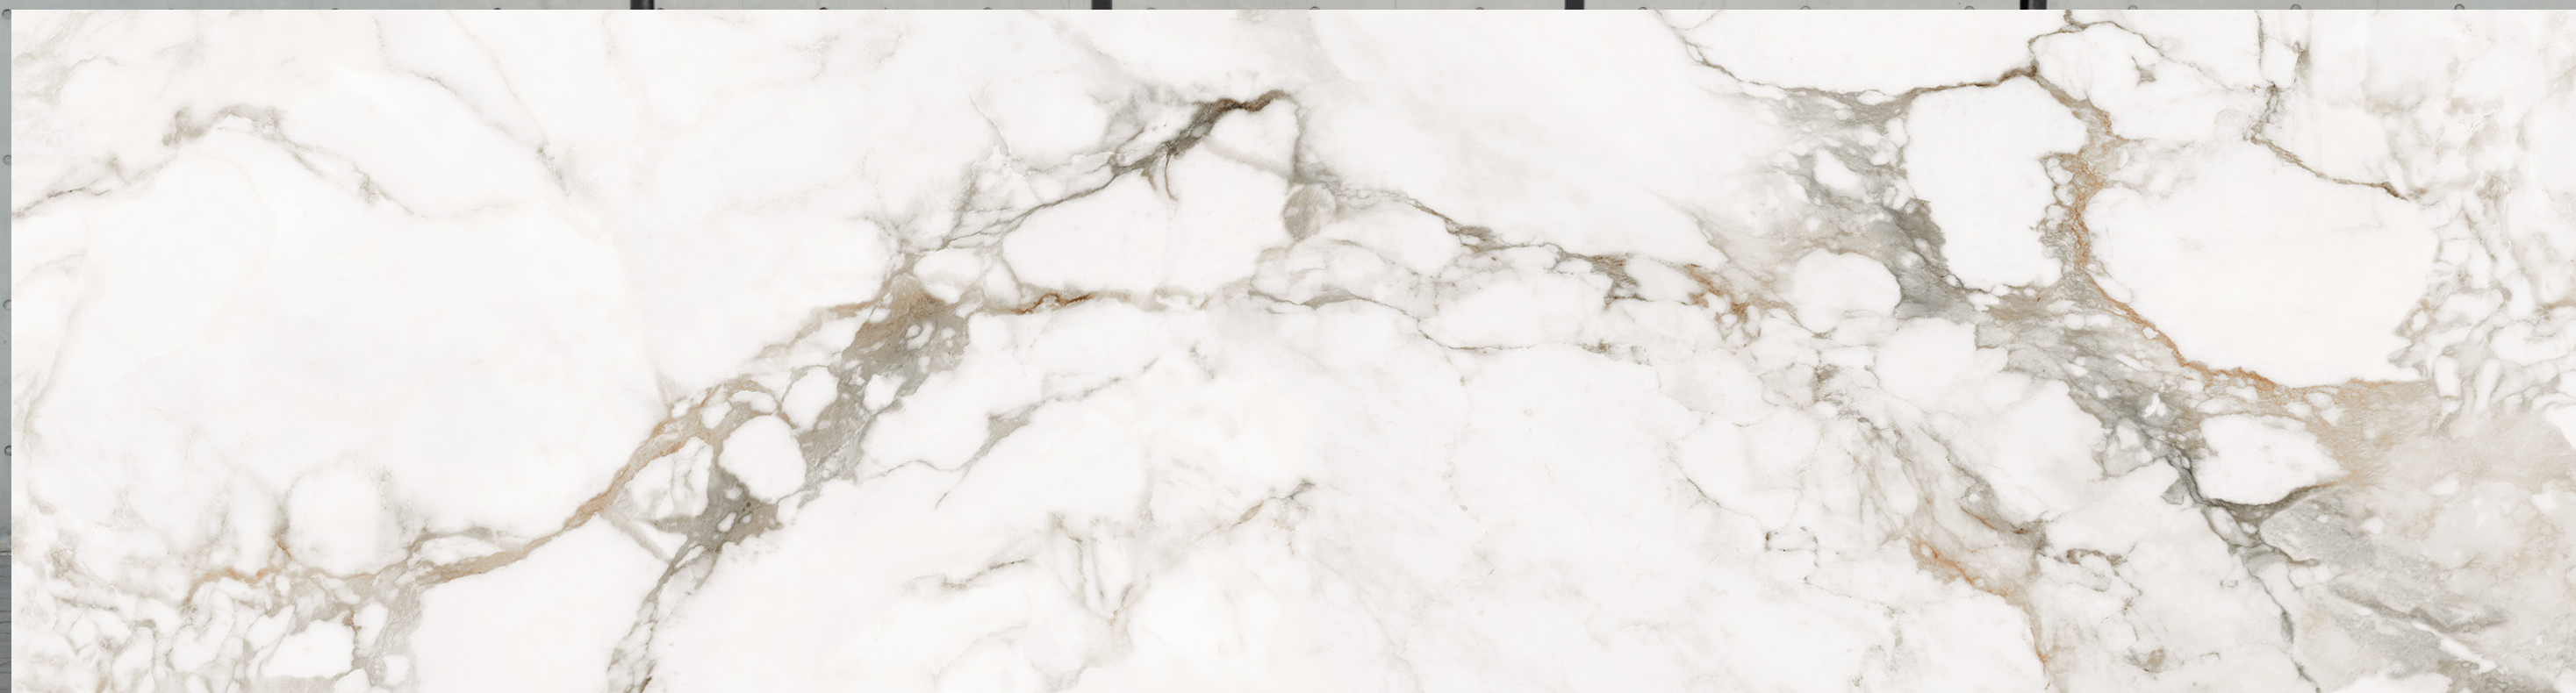

**MONT BLANC**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



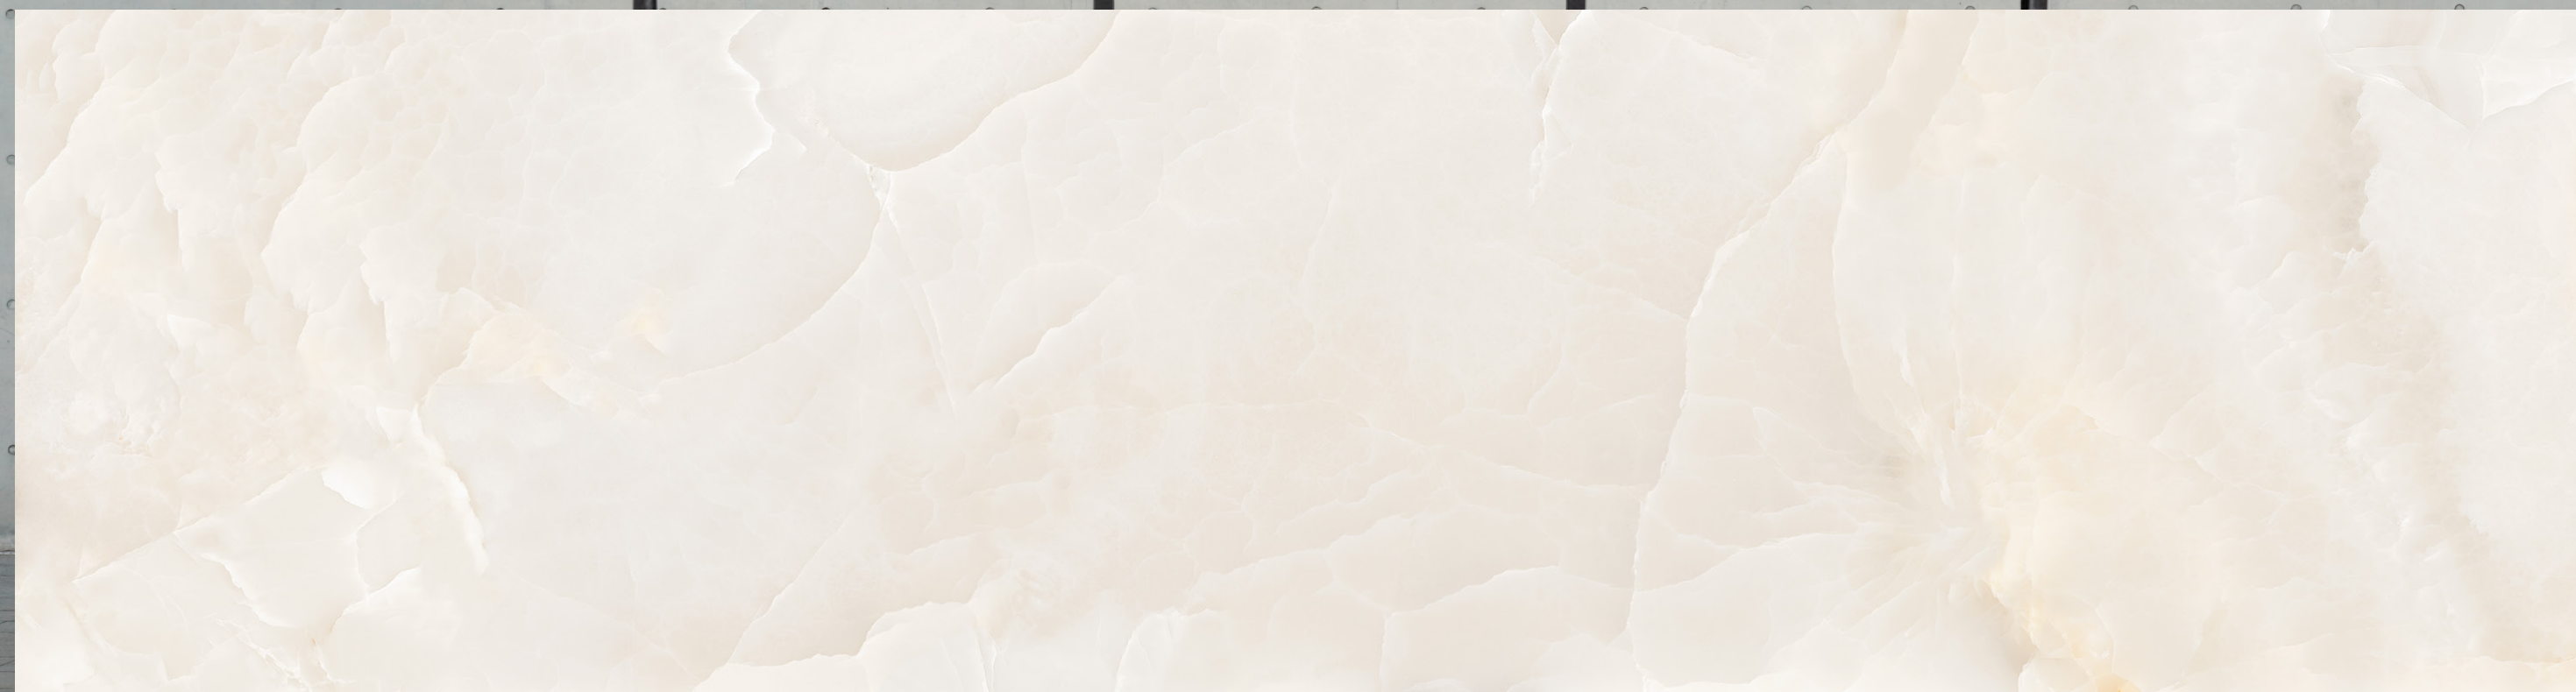

**PEARL CREAM ONYX**


**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



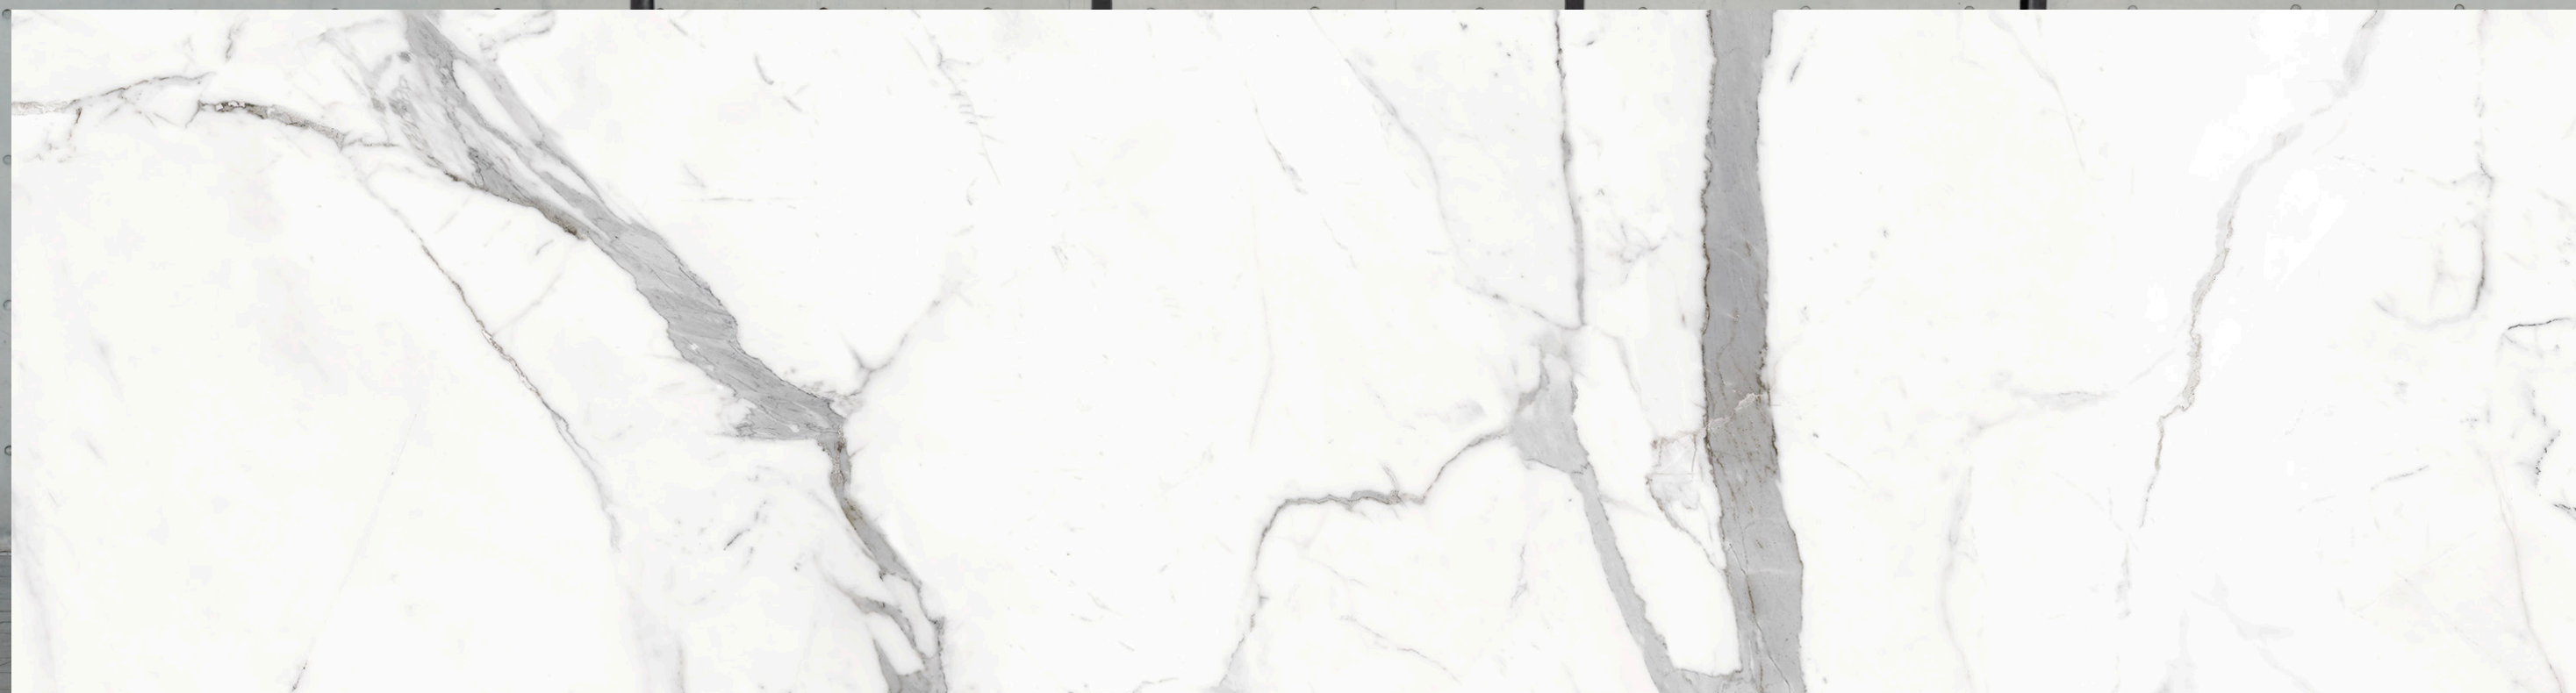

**STATUARIO ALTISSIMO**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**





**WAVE SILK**

**BODY**  
**WHITE BODY**

**FINISH**  
**MATT**

**SIZE**  
**800x3200 MM**

**THICKNESS**  
**15 MM**



## Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT   | EXAMPLE                                    |
|---------------|--------------------|--------------------------------------------|
| Grease        | Alkaline - Solvent | Detergent                                  |
| Oil           | Solvent            | Ammonia, Backing Soda                      |
| Ink           | Oxidant - Solvent  | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust          | Acid               | Hydrochloric Acid, Vinegar, Red Harpic     |
| Lime          | Acid               | Descaling Reagent, Hydro Chloric Acid      |
| Cement        | Acid               | Hydro Chloric Acid                         |
| Wine          | Alkaline           | Ammonia, Liquid Bleach                     |
| Coffee        | Alkaline - Solvent | Ammonia, Liquid Bleach                     |
| Rubber        | Solvent            | Alcohol, Thinner                           |
| Plaster       | Acid               | Hydro Chloric Acid                         |
| Candle Wax    | Solvent            | Alcohol, Thinner                           |
| Iodine        | Oxidant            | Liquid Bleach                              |
| Blood         | Oxidant            | Liquid Bleach                              |
| Ice Cream     | Alkaline           | Liquid Bleach                              |

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

## Technical Specification

| CHARACTERISTIC                                                 | STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla | MEAN VALUE                                                                           | TEST METHOD     |
|----------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------|-----------------|
| Regulatory Properties                                          |                                               |                                                                                      |                 |
| Deviation in Length and Width                                  | ± 0.30 % (±1.00mm)                            | ± 0.10 %                                                                             | ISO 10545-2     |
| Deviation in Thickness                                         | ± 5.00 % (±0.50mm)                            | ± 5.00 %                                                                             | ISO 10545-2     |
| Straightness in Side                                           | ± 0.30 % (±0.80mm)                            | ± 0.10 %                                                                             | ISO 10545-2     |
| Rectangularity                                                 | ± 0.30 % (±1.50mm)                            | ± 0.10%                                                                              | ISO 10545-2     |
| Surface Flatness Central Curvature                             | ± 0.40 % (±1.80mm)                            | ± 0.50 %                                                                             | ISO 10545-2     |
| Surface Flatness Edge Curvature                                | ± 0.40 % (±1.80mm)                            | ± 0.50 %                                                                             | ISO 10545-2     |
| Surface Flatness Warpage                                       | ± 0.40 % (±1.80mm)                            | ± 0.50 %                                                                             | ISO 10545-2     |
| Surface Quality                                                | > 95% defects free                            | > 95% defects free                                                                   | ISO 10545-2     |
| Small Color Difference(for Plain Colour)                       | ΔE < 1.00                                     | ΔE < 0.30                                                                            | ISO 10545-16    |
| Glossiness ( Polished)                                         | as per mfg.                                   | Gloss Value> 90                                                                      | Gloss Meter 60° |
| Glossiness (Matt)                                              | as per mfg.                                   | 3 <Gloss Value<7                                                                     | Gloss Meter 60° |
| Glossiness (Satin/Posh)                                        | as per mfg.                                   | 7<Gloss Value<18                                                                     | Gloss Meter 60° |
| Structural Properties                                          |                                               |                                                                                      |                 |
| Water absorption                                               | ≤ 0.50 %                                      | ≤ 0.060 %                                                                            | ISO 10545-3     |
| Bulk density                                                   | as per mfg.                                   | Min. 2.28 g/cc                                                                       | ISO 10545-3     |
| Massive Mechanical Properties                                  |                                               |                                                                                      |                 |
| Modulus of rupture                                             | Min. 35.0 N/mm²                               | Min. 42.0 N/mm²                                                                      | ISO 10545-4     |
| Breaking strength thickness <7.5                               | Min. 700.0 N                                  | Min. 1000.0 N                                                                        | ISO 10545-4     |
| Breaking strength thickness ≥7.5                               | Min. 1300.0 N                                 | Min. 1800.0 N                                                                        | ISO 10545-4     |
| Breaking strength thickness ≥7.5mm                             | Min. 1300.0 N                                 | Min. 7500.0 N                                                                        | ISO 10545-4     |
| Surface Mechanical Properties                                  |                                               |                                                                                      |                 |
| MOH'S hardness #                                               | as per mfg.                                   | Glossy Min. 4*/ Posh Min. 6                                                          | BS EN 15771     |
| Surface abrasion resistance #                                  | as per mfg.                                   | Glossy Min. 2/ Posh Min. 3                                                           | ISO 10545-7     |
| Deep abrasion resistance #                                     | Max. 175m <sup>3</sup> m                      | Max. 132m <sup>3</sup> m                                                             | ISO 10545-6     |
| Thermal Hydrometric Properties                                 |                                               |                                                                                      |                 |
| Moisture expansion                                             | Max. 0.06%(0.6mm/m)                           | Max. 0.02mm/m                                                                        | ISO 10545-10    |
| Thermal expansion(COE) at 100°C                                | as per mfg.                                   | Max. 6.0 x 10 <sup>-6</sup>                                                          | ISO 10545-8     |
| Thermal shock resistance                                       | Min. 10 Cycle                                 | Min. 10 Cycle                                                                        | ISO 10545-9     |
| Impact resistance(COR) #                                       | Min. 0.55                                     | Min. 0.55                                                                            | ISO 10545-5     |
| Frost resistance                                               | as per mfg.                                   | Frost Proof                                                                          | ISO 10545-12    |
| Chemical Properties                                            |                                               |                                                                                      |                 |
| Resistance to staining glazed                                  | Min. Class 3                                  | Min. Class 4                                                                         | ISO 10545-14    |
| Resistance to household chemicals & swimming pool salts glazed | Min. Class GB                                 | Min. Class GA                                                                        | ISO 10545-13    |
| Resistance to low concentrate acid and alkalis glazed          | as per mfg.                                   | Min. Class GLB**                                                                     | ISO 10545-13    |
| Resistance to high concentrate acid and alkalis glazed         | as per mfg.                                   | Min. Class GHB**                                                                     | ISO 10545-13    |
| Safety Properties                                              |                                               |                                                                                      |                 |
| Skid resistance(DCOF-DRY) ##                                   | as per mfg.                                   | Glossy P0(< <sup>12</sup> ) / Posh ≥P <sup>1</sup> ( <sup>12</sup> - <sup>24</sup> ) | BS 7976-2       |
| Slip resistance(DCOF)( R value) ##                             | as per mfg.                                   | R9 to R <sup>13</sup>                                                                | DIN 51130       |
| Fire resistance                                                | as per mfg.                                   | Fire Proof                                                                           | N.A.            |

\* With Nano polished  
\*\* Except Hydrofluoric Acid & it's compound  
# Tiles Intended for use on floor  
## As per customer requirement

## Packing Details

| PRODUCT | BODY       | SIZE       | THICKNESS | TILES / BOX | COVERAGE AREA / BOX | WEIGHT (Kgs) |
|---------|------------|------------|-----------|-------------|---------------------|--------------|
| Matt    | Color Body | 800x3200mm | 15mm      | 1pc         | 27.55 Sq ft         | 90 Kgs       |